

iGLO LED Corn Cob Series - 30W, With Cover

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET




Features

- cULus, DLC certificate.
- E26 or E39 lamp base.
- 360° lighting, high CRI.
- IP64 Waterproof Rating
- Internal driver, input voltage AC100-277V.
- New style and high efficient wide-range input.
- Long lifespan and good heat dissipation.
- Direct replacement for Metal Halide.
- Easy Installation.
- Fits many different fixtures to replace traditional lamps.



Applications

Warehouse, Garages, Factory Lighting,
Street lighting, Homes, Offices, Hotels,
Hospitals, Schools, Gardens, etc.

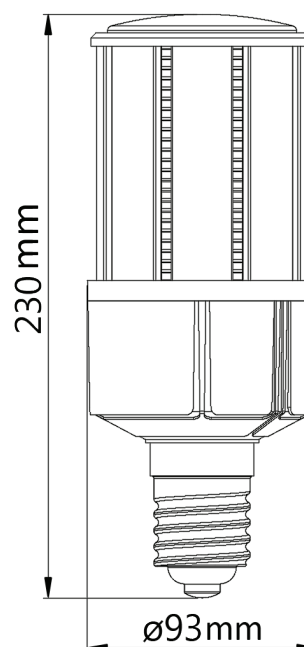

iGLO LED Corn Cob Series - 30W, With Cover

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT





PRODUCT SPECIFICATIONS

iGLO LED Corn Cob Series:	GL30WCCE26WCSNC4000KUDX4.0 (E26) GL30WCCE26WCSNC5700KUDX4.0 (E26) GL30WCCE26WCSNC6000KUDX4.0 (E26)	GL30WCCE39WCSNC4000KUDX4.0 (E39) GL30WCCE39WCSNC5700KUDX4.0 (E39)
Wattage:	30W	
Lumens:	3200 - 3400 LM	3373 - 3530 LM
CCT:	4000K/5700K/6000K	4000K/5700K
Input Voltage:	100-277VAC, 50/60Hz	
Power Factor:	≥0.90	
Efficacy:	105-112 LM/W	111 - 114 lm/W
Equivalent:	(E26 and E39 Base): 60W CFL, 100W MHL/HPS/HID	
CRI:	>80	
THD:	≤18%	
Dimmable:	No	
Dimensions:	Φ93*230 mm	
Beam Angle:	360°	
Base:	E26	E39
Operating Temperature:	-20°C to 45°C	
Housing	PC+AL (Fin)	
Housing Color:	White+Grey	
Cover/Lens Type:	Clear	
Waterproof Rating:	IP64	
Certificates:	cULus	cULus, DLC
	DLC Certified for E39, 4000K and 5700K Only	
Warranty:	5 Years	

Size	Qty / Carton	Net Weight/Carton	Gross Weight/Carton
495*375*270mm	12 pcs	5.3 kg	8.2 kg

PHOTOMETRIC DATA

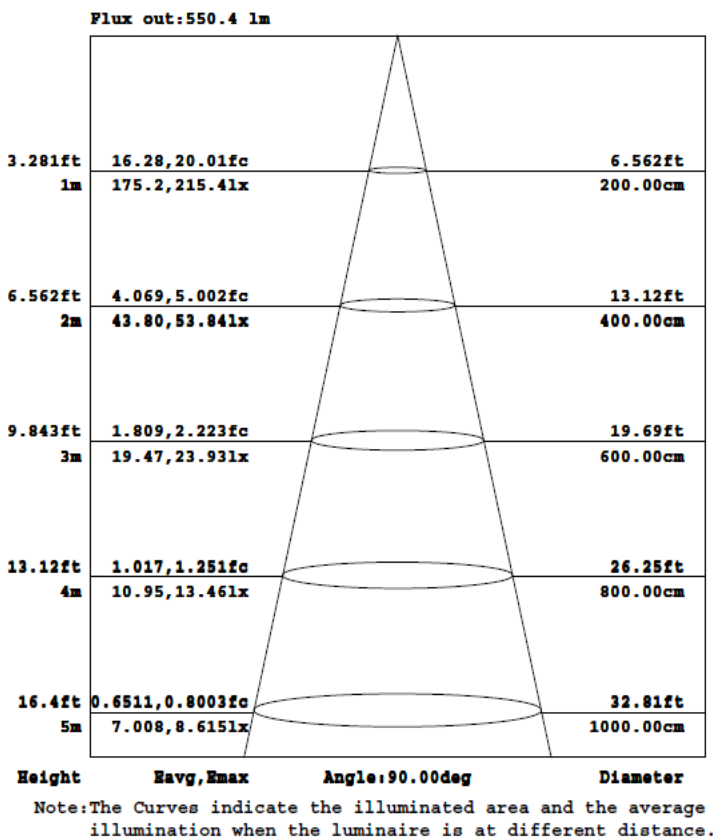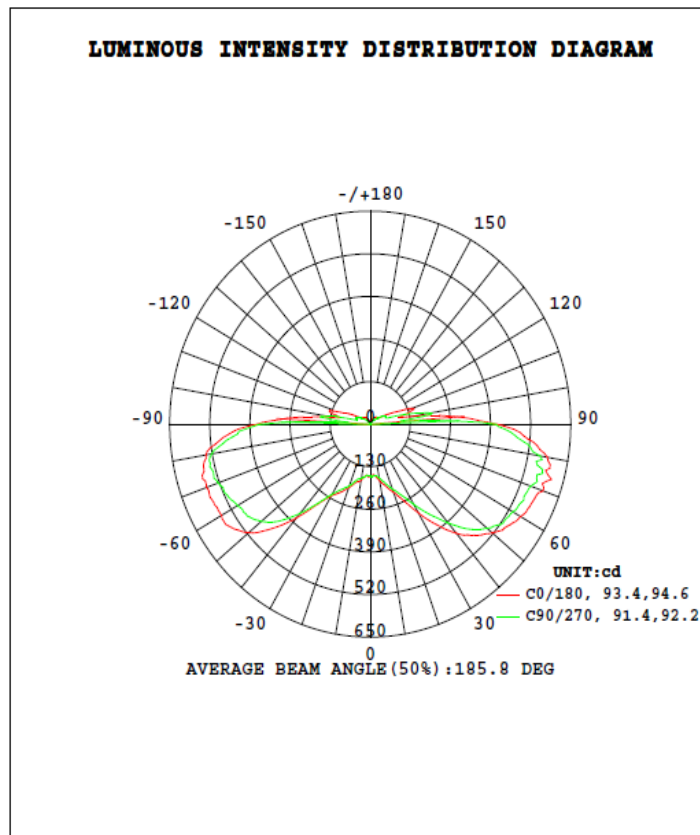

Notice:

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, please make sure the wiring section is insulated.
- Make sure to remove or bypass the ballast in the fixtures before install the lamps.
- Suitable for damp locations. Do not use with dimmers.
- Suitable for use in enclosed luminaires, min. lam compartment dimensions: 340*200*200MM.
- No-professionals, must not install and disassemble the lamps.

