

iGLO LED Corn Cob Series - 40W, With Cover

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET




Features

- cULus, DLC certificate.
- E26 or E39 lamp base.
- 360° lighting, high CRI.
- IP64 Waterproof Rating
- Internal driver, input voltage AC100-277V.
- New style and high efficient wide-range input.
- Long lifespan and good heat dissipation.
- Direct replacement for Metal Halide.
- Easy Installation.
- Fits many different fixtures to replace traditional lamps.



Applications

Warehouse, Garages, Factory Lighting,
Street lighting, Homes, Offices, Hotels,
Hospitals, Schools, Gardens, etc.

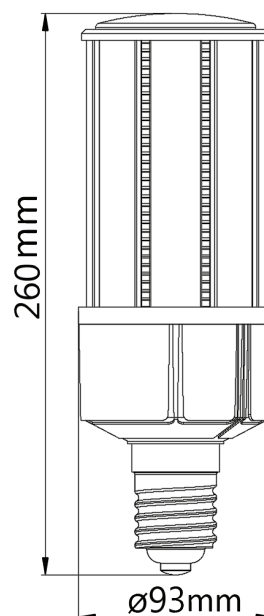

iGLO LED Corn Cob Series - 40W, With Cover

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT





PRODUCT SPECIFICATIONS

iGLO LED Corn Cob Series:	GL40WCCE26WCSNC5700KUDX4.0 (E26)	GL40WCCE39WCSNC3000KUDX4.0 (E39) GL40WCCE39WCSNC4000KUDX4.0 (E39) GL40WCCE39WCSNC5700KUDX4.0 (E39)
Wattage:	40W	
Lumens:	4300 - 4600 LM	4525 - 4785 LM
CCT:	5700K	3000K/4000K/5700K
Input Voltage:	100-277VAC, 50/60Hz	
Power Factor:	≥0.90	
Efficacy:	107-115 lm/W	114 - 119 lm/W
Equivalent:	(E26 and E39 Base): 80W CFL, 150W MHL/HPS/HID	
CRI:	>80	
THD:	≤18%	
Dimmable:	No	
Dimensions:	Φ93*260 mm	
Beam Angle:	360°	
Base:	E26	E39
Operating Temperature:	-20°C to 45°C	
Housing	PC+AL (Fin)	
Housing Color:	White+Grey	
Cover/Lens Type:	Clear	
Waterproof Rating:	IP64	
Certificates:	cULus	cULus, DLC
	DLC Certified for E39, 4000K and 5700K Only	
Warranty:	5 Years	

Size	Qty / Carton	Net Weight/Carton	Gross Weight/Carton
495*375*305mm	12 pcs	6.3 kg	9.2 kg

PHOTOMETRIC DATA

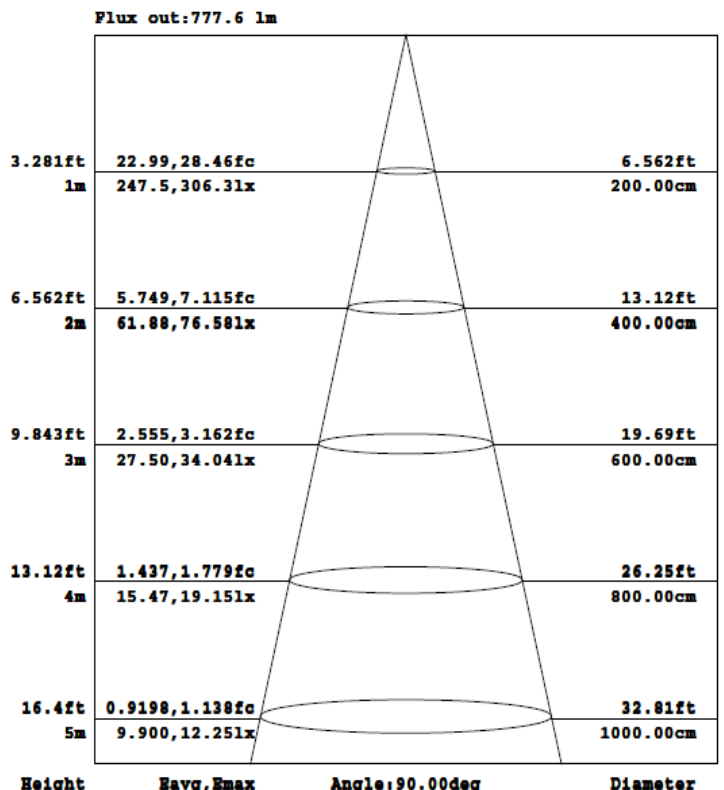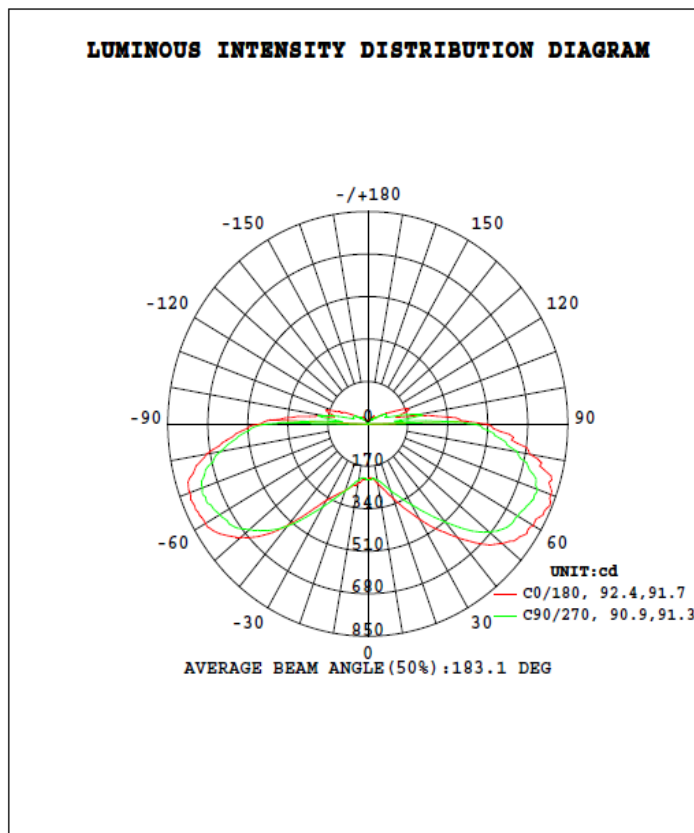

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Notice:

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, please make sure the wiring section is insulated.
- Make sure to remove or bypass the ballast in the fixtures before install the lamps.
- Suitable for damp locations. Do not use with dimmers.
- Suitable for use in enclosed luminaires, min. lam compartment dimensions: 380*200*200MM.
- No-professionals, must not install and disassemble the lamps.

