

iGLO LED Frame Panels - 55W, 2x4

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



FC RoHS


Features

- cETLus, DLC, FCC, ROHS certificates
- 3-in-1 dimming(0-10V;PWM;Rx)
- IP40 driver, High CRI
- Input voltage 100-277V AC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury



Applications

Hotels,Factories,Offices,Residential,Buildings,
Schools,Hospitals, Meeting rooms

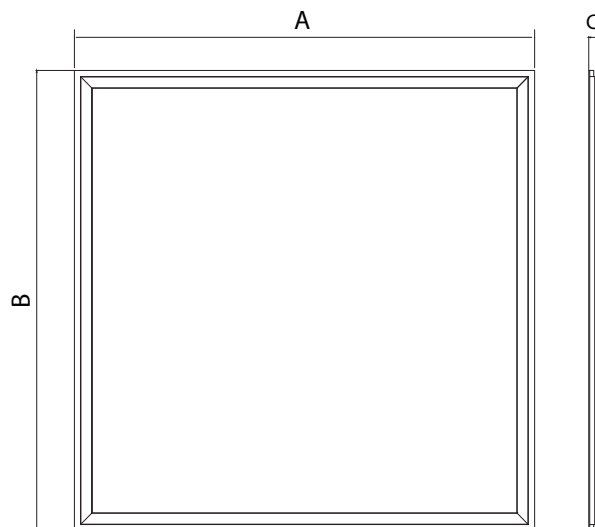

Maximum overall	A	B	C
2*4ft	1213 mm	603mm	15mm

iGLO LED Frame Panels - 55W, 2x4

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



PRODUCT SPECIFICATIONS

iGLO LED Frame Panels:	Order Code: 711841815905
Wattage:	55W
Lumens:	7102 - 7356 LM
CCT:	3000K
Input Voltage:	100-277VAC, 50/60Hz
Power Factor:	≥0.90
Efficacy:	131-135 lm/W
CRI:	≥80
THD:	≤12%
Dimmable:	Yes, 3-in-1 dimming(0-10V;PWM;Rx)
Dimensions:	2x4ft, 1213*603*15mm
Projected Hours (Life Span):	>50,000 Hours
Beam Angle:	120°
Operating Temperature:	-20°C to 45°C
Waterproof Rating:	IP40
Certificates:	ETL, FCC, RoHS, DLC
Warranty:	5 Years



Box Size	Qty/Carton	Gross Weight	Net Weight
1300*230*650mm	6	7.5 kg/CTN	1.25 kg/PCS

iGLO LED Frame Panels - 55W, 2x4


ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



WIRING DIAGRAMS

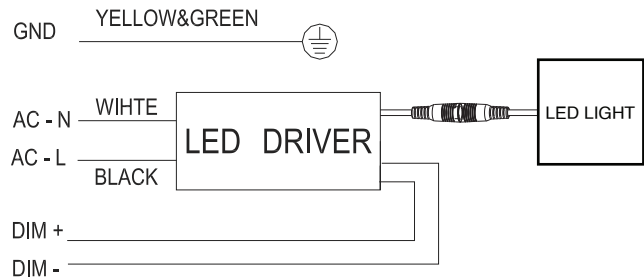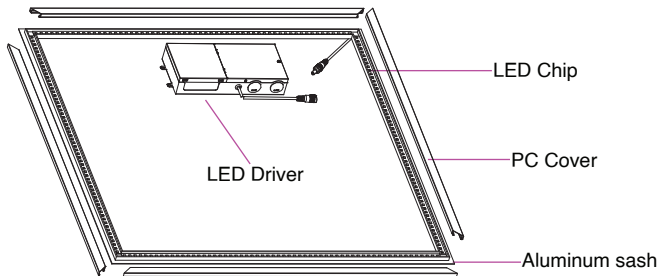

INSTALLATION INSTRUCTION

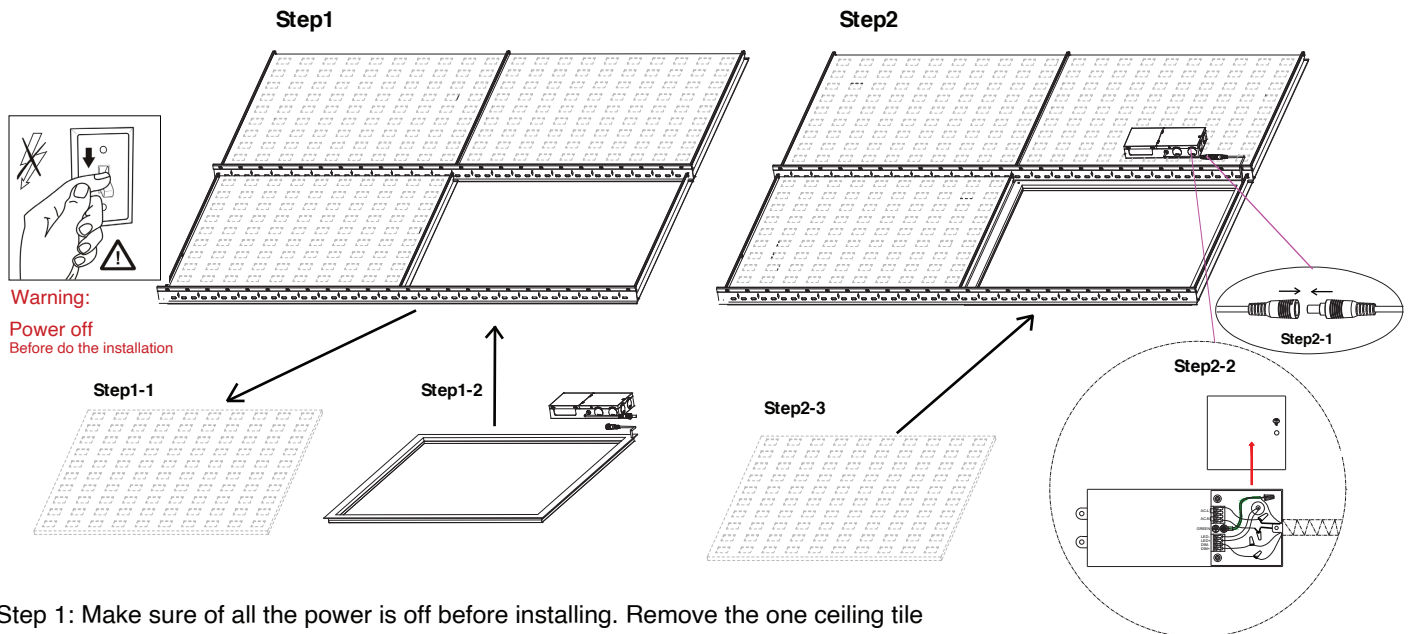

Step 1: Make sure of all the power is off before installing. Remove the one ceiling tile that you need to install light fixture on. Then place the light fixture on the T-bar carefully and make sure it is correctly in place and secure.

Step 2: Place the driver on top of the next ceiling tile. Connect the cable between the driver and the lighting fixture.

Step 3: Open the driver's junction box and connect the AC wire to the driver correctly (L=black & N=white)

Warning:

Ensure the power supply has been cut off before connecting the wire, and all wiring and installation of this product are required to be operated by professionals.