

iGLO LED Compact Curve Floodlight Series - 12W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED
IGLOLED.NET




Features

- cULus, DLC, ETL, FCC certificates.
- IP65, suitable for wet locations, input voltage 100-277VAC.
- High light transmittance PC, anti-UV and fire resistant.
- High conductive, waterproof, aging resistance, salt mist resistance.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.




MOUNTING OPTIONS

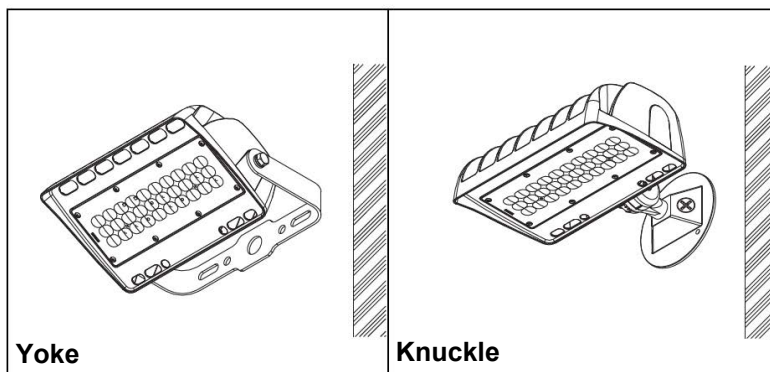

Applications

Gas Stations, Service Stations,
Underground Parking Lot, Warehouse,
Garage, Work Floor, Factories and etc.

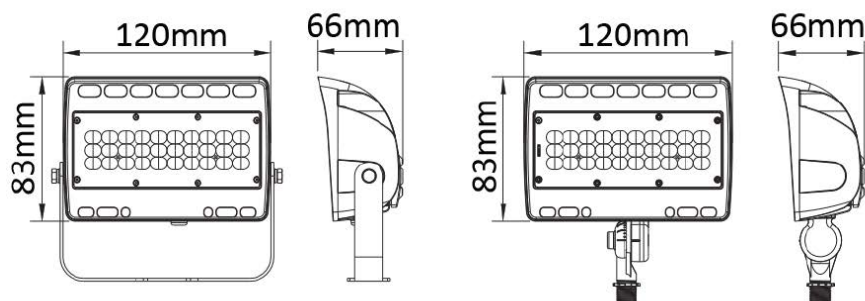

iGLO LED Compact Curve Floodlight Series - 12W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



PRODUCT SPECIFICATIONS

DLC Listing: GL12WCPCURVEFLTH3000KUDX

iGLO LED Compact Curve Floodlight Series:	GL12WCPCURVEFLTH3000KUDX
Mounting Installation:	KN : Knuckle Mounting YK: Yoke Mounting
Wattage:	12W
Lumens:	1270 - 1423 lm
CCT:	3000K
Input Voltage:	100-277VAC, 50-60 Hz
Power Factor:	≥0.90
Efficacy:	102-119 lm/W
CRI:	>80
THD:	≤12%
Dimensions:	4.72*3.27*2.60 in
Projected Hours (Life Span):	>50,000 Hours
Beam Angle:	90°x120°
Housing	Aluminum
Housing Color:	Bronze, Black, White
Waterproof Rating:	WET (IP65)
Certificates:	cULus, DLC, ETL, FCC
Warranty:	5 Years

Mounting	Box Size	Qty/Carton	Net Weight	Gross Weight
Knuckle	11.61*10.43*12.80 in	12 pcs	0.7 kg/PCS	8.5 kg/CTN
Yoke	13.18*12.4*10.43in	12 pcs	0.8 kg/PCS	9.5 kg/CTN