


iGLO LED Flex Curve Floodlight Series - 40W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT




Features

- cULus, DLC certificates.
- High CRI.
- IP65, input voltage 100-277VAC.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.

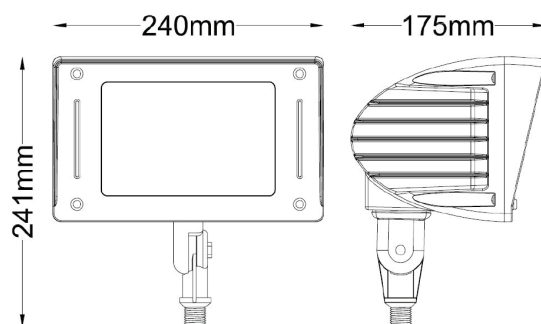

Applications

Factories, Libraries, squares, Parks,
Supermarkets, Stations,
Advertising and Sign Lighting and
etc.

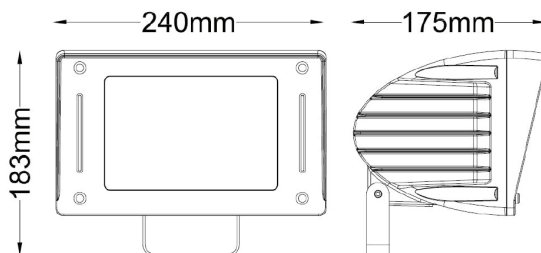

iGLO LED Flex Curve Floodlight Series - 40W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT



PRODUCT SPECIFICATIONS

iGLO LED Flex Curve Floodlight Series:	GL40WFXCURVECSN3000KUDX GL40WFXCURVECSN3500KUDX GL40WFXCURVECSN4000KUDX GL40WFXCURVECSN5000KUDX GL40WFXCURVECSN5700KUDX
Mounting Installation:	KN : Knuckle Mounting YK: Yoke Mounting
Wattage:	40W
Lumens:	4257 - 4492 lm
CCT:	3000K/3500K/4000K/5000K/5700K
Input Voltage:	100-277VAC, 50/60 Hz
Power Factor:	≥0.90
Efficacy:	106-111 lm/W
CRI:	>72
THD:	≤15%
Dimensions:	240*175*241mm 240*175*183mm
Beam Angle:	110°
Housing	Aluminum + Stalinite
Housing Color:	Brown, Vermilion
Waterproof Rating:	WET (IP65)
Operating Temperature:	-20°C to 45°C
Certificates:	cULus, DLC
Warranty:	5 Years

Box Size	Qty/Carton	Net Weight	Gross Weight
280*220*250 mm	1 pc	3.4 kg/PCS	4.21 kg/CTN

iGLO LED Flex Curve Floodlight Series - 40W


ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED


IGLOLED.NET

PHOTOMETRIC DATA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

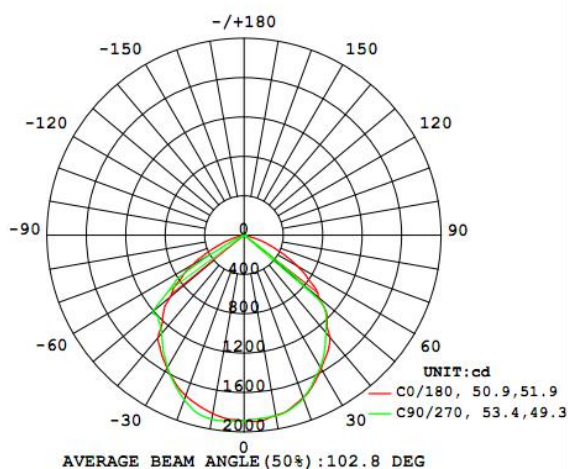

Flux out:3468 lm

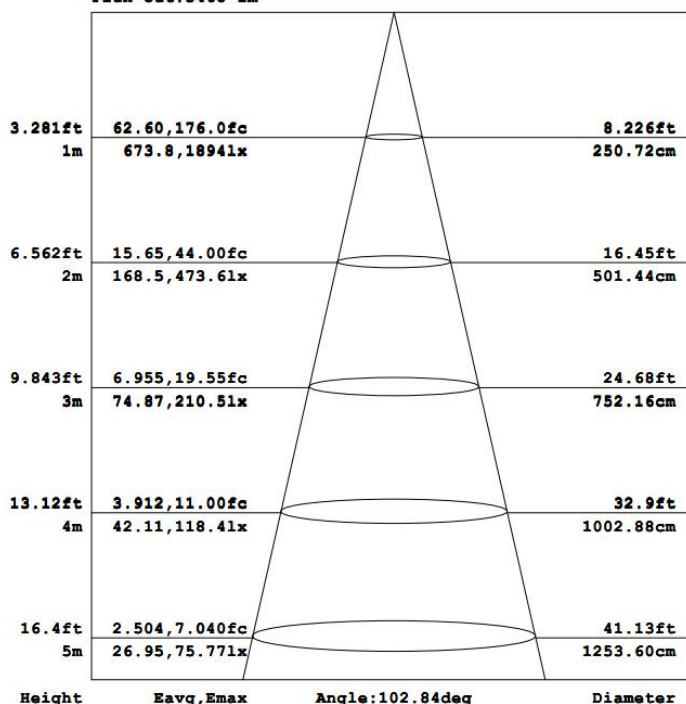

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.