

iGLO LED Matrix Shoebox - 60W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT


iGLOLED
IGLOLED.NET



YOKE MOUNTING



ADJUSTABLE FITTER MOUNTING

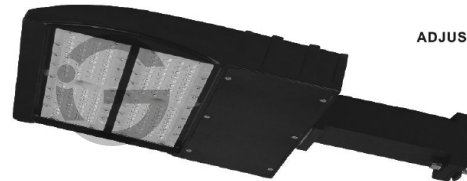




DIRECT MOUNTING

Features

- cULus, DLC certificates
- Philips Chip, high CRI
- IP65 driver, Input voltage 100-277VAC
- 150*85° lens angle
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, Long lifespan
- Light is soft and uniform, Safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.

Applications

Outdoor basketball court, tennis court,
Badminton court, football fields; school
playgrounds, stadiums; Community leisure/
entertainment plaza, road lamp and etc.

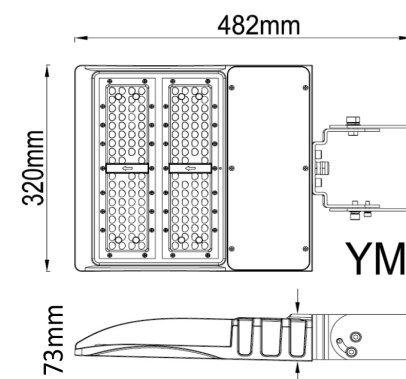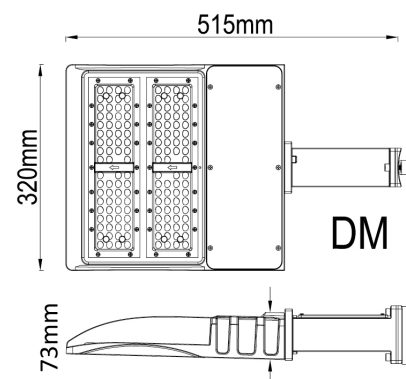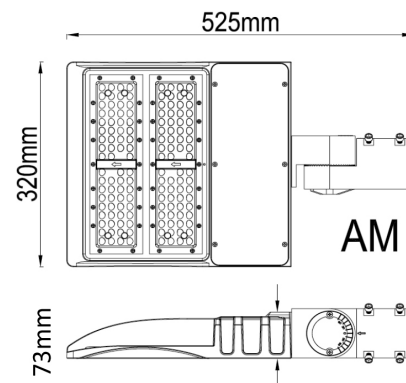

PRODUCT SPECIFICATIONS

DLC Listing: GL60WMXFL[AM,YM,DM]SN4000KUDX

iGLO LED Matrix Shoebox Series:	GL60WMXFL[AM,YM,DM]SN4000KUDX
Mounting Installation:	AM: Adjustable Slip Fitter Mounting DM: Direct Mounting YM: Yoke Mounting
Wattage:	60W
Lumens:	8474 - 8581 lm
CCT:	4000K
Input Voltage:	100-277VAC, 50/60Hz
Power Factor:	≥0.90
Efficacy:	142 lm/W
CRI:	>70
THD:	≤20%
Dimensions:	AM:20.67*12.6*2.87 in DM:20.28*12.6*2.87 in YM: 18.98*12.6*2.87 in
Beam Angle:	150*85° (Type III)
Operating Temperature:	-40°C to 45°C
Housing	Aluminum
Housing Color:	Black / Brown
Optional Accessories:	Photocell / Surge Protector
Waterproof Rating:	WET (IP65)
Certificates:	cULus, DLC
Warranty:	5 Years
EPA:	1.5ft ²

Mounting	Box Size	Qty/Carton	Gross Weight	Net Weight
Adjustable Mounting	22.44*17.32*5.51in	1	7.4 kg/CTN	6.4 kg/PCS
Direct Mounting	22.44*17.32*5.51in	1	6.9 kg/CTN	5.9 kg/PCS
Yoke Mounting	22.44*17.32*5.51in	1	7 kg/CTN	6 kg/PCS

PHOTOMETRIC DATA

