

iGLO LED Canopy Series - 40W

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

iGLOLED

IGLOLED.NET





Features

- cULus Certificate.
- High CRI.
- Input Voltage 120-277VAC.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.



Applications

Gas Stations, Service Stations,
Underground Parking Lot, Warehouse,
Garage, Work Floor Factories and etc.

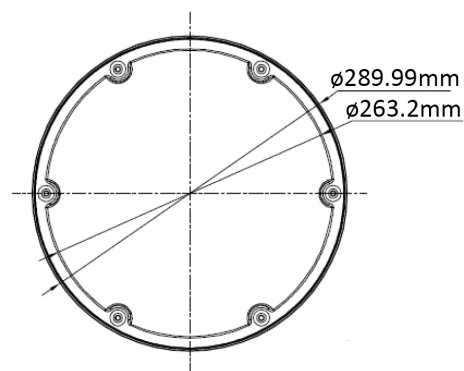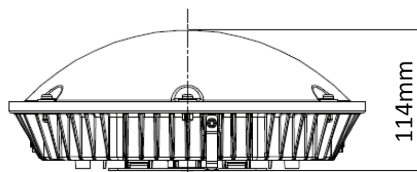

PRODUCT SPECIFICATIONS

iGLO LED Canopy Series:	GL40WVCANPYBET5700KUDX
Wattage:	40W
Lumens:	5200±5% lm
CCT:	5700K
Input Voltage:	100-277VAC
Power Factor:	≥0.90
Efficacy:	130-135 lm/W
CRI:	>80
Dimmable:	Yes, 1-10V
Dimensions:	ø290*114mm
Projected Hours (Life Span):	≥50,000 Hours
Beam Angle:	160°
Operating Temperature:	-20°C to 40°C
Housing	Aluminum+PC
Installation:	Surface-mounted, NPT, Pole-Mounted
Accessory:	Occupancy sensor integrated
Waterproof Rating:	WET (IP65)
Certificate:	cULus
Warranty:	3 Years

Box Size	Qty/Carton	Gross Weight	Net Weight
335*335*165mm	1	-- kg/CTN	3.4 kg/PCS